

V pol Groundplane Antenna 146 - 174 MHz Vertical Polarization

The Schomandl 711 530 and K51262 omni-directional groundplane antennas are intended for use in professional fixed-station applications in the 146-174 MHz band.



- Design based on decades of proven reliability.
- Easy installation, no cutting of radials on site necessary.
- Variable mounting configurations allow feeder cable to be run inside or outside the support pipe.
- Stainless steel ground radials, hardware, and fastenings.

Type No.	Antenna	K 51 26 2	711 530
	Spare radials	K 51 26 20 2	K 51 26 20 2
Input		By means of a cable RG-213/U with termination inside antenna.	N female
Frequency range		146 - 174 MHz	
Gain (ref. $\lambda/2$ dipole)		0 dB	
VSWR		< 1.5	
Impedance		50 Ω	
Polarization		Vertical	
Max. power		170 Watt	700 Watt
		(at 50 °C ambient temperature)	
Weight		1.2 kg	
Wind load		25 N (at 150 km/h)	
Max. wind velocity		200 km/h	
Packing size		654 x 112 x 97 mm	
Radiator length		422 mm	
Length of radials		617 mm	
Order No.		80000013	80000014


Material: Radiator and radials: Weather-resistant aluminum.
Mounting U-bolt and all screws and nuts: Stainless steel.

Mounting: The antenna can be attached in two ways with the supplied mounting kit:
1. On the tip of a tubular mast of 40 - 54 mm diameter (connecting cable runs inside the mast).
2. Laterally at the tip of a tubular mast of 20 - 54 mm diameter (connecting cable runs outside the mast).


Grounding: - Entire antenna at DC ground potential to prevent electrostatic noise and to improve lightning protection
The inner conductor is capacitively coupled.

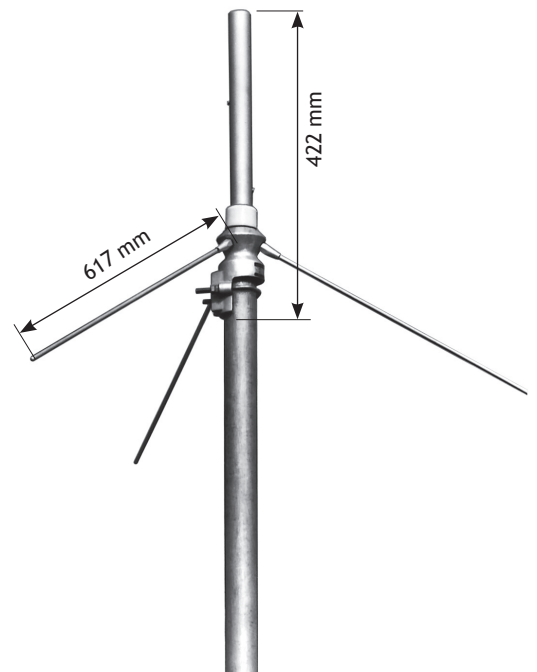


Horizontal Pattern



Vertical Pattern



On the tip of a tubular mast



Laterally at the tip of a tubular mast