

19" Rack mounting kit for MPX 2/6... , MPX 70/6... , DPF 2/6... and DPF 70/6 duplex filters.

DESCRIPTION

- > For future solutions, integrating duplex filter with repeater.
- > Delivered unassembled and without filter (to be ordered separately).
- > The 19" Duplexer mounting kit with the Procom duplex filter MPX 2/6... , MPX 70/6... , DPF 2/6... and DPF 70/6 duplex filters are easily rack mounted.
- > The mounting kit is one unit (1HU) high and compatible with both types of Procom duplex filters, one for MPX filter and one for DPF filter.



ORDERING

Type	Product No.	Description
19" MPX Mounting kit	210002291	MPX filter
19" DPF Mounting kit	210002327	DPF filter
Cables for Motorola SLR 5500	210002305	Can also be used with Motorola DR3000
Cables for ICOM IC-FR5000 and IC-FR6000	210002351	
Cables for HYTERA RD 98x and 98xS	210002352	

SPECIFICATIONS


Mechanical	
Weight: DPF	600 g
Dimensions	19" x 1HU x D. (483 x 43 x 220 mm (DPF)) (483 x 43 x 130 mm (MPX))
Weight: MPX	500 g

ADDITIONAL DATA

MODEL	19" Duplexer Mounting kit
CONSISTS OF	1 HU Frontplate 1 Mounting plate 2 black M5x6 mm screw 4 M4x6 mm screw
To be ordered seperately: Cables for Motorola SLR 5500	500 mm RG 400 cable 50 Ohm N(m) straight / N(m) angle 500 mm RG 400 cable 50 Ohm N(m) straight / BNC(m) angle
To be ordered seperately: Cables for ICOM IC-FR5000 and FR6000	500 mm RG 400 cable 50 Ohm N(m) straight / N(m) angle 500 mm RG 400 cable 50 Ohm N(m) straight / N(m) angle
To be ordered seperately: Cables for HYTERA RD98x and RD98xS	500 mm RG 400 cable 50 Ohm N(m) straight / N(m) angle 500 mm RG 400 cable 50 Ohm N(m) straight / N(m) angle

MECHANICAL	
DIMENSIONS (W x H x D)	19" x 1HU x D. (483 x 43 x 220 mm (DPF)) (483 x 43 x 130 mm (MPX))
WEIGHT: DPF	600 g.
WEIGHT: MPX	500 g.


MOUNTING KIT

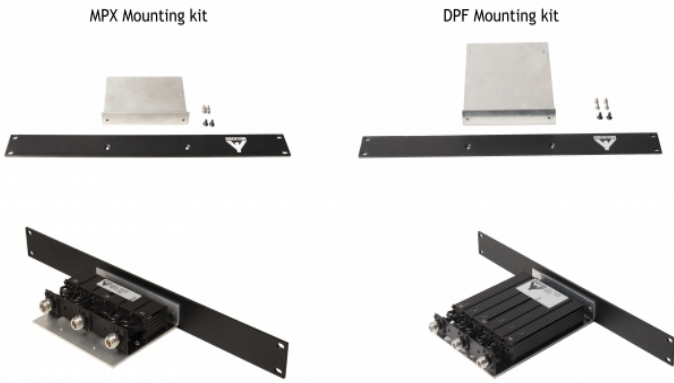

FILTER NOT INCLUDED



CAN BE CLOSED ABOVE OR BELOW THE REPEATER

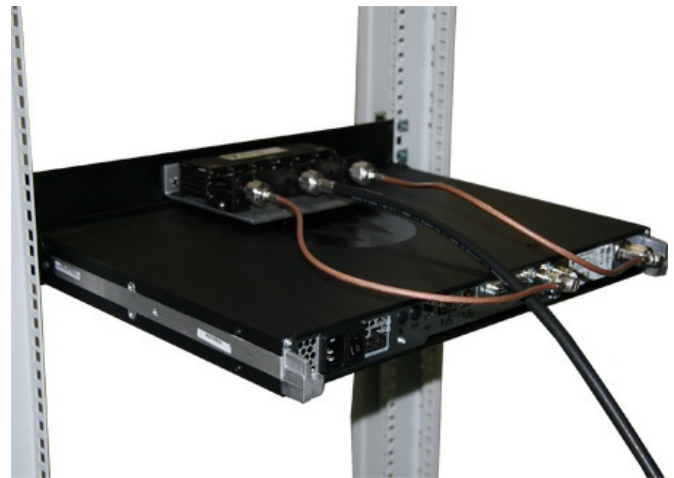

TX AND RX CABLES CAN BE SWITCHED TO HIGH OR LOW ON THE FILTER



CABLES CAN BE SWITCHED FROM THE FRONT