



## Indoor Omnidirectional MIMO Antenna 698-4000 MHz

The omnidirectional antenna I-ATO5-43-698/4000 is designed for broadband in-building DAS applications supporting all kind of safety as well as 4G and 5G commercial wireless communication networks. The antenna combines an aesthetical design with superior electrical characteristics notably a PIM optimized design to minimize network interferences. The antenna is constructed from lightweight materials ideal for easy ceiling mounting. The low profile and off-white radome blends easily into most building aesthetics with minimum visual impact.



I-ATO5-43-698/4000

### FEATURES / BENEFITS

- ➔ Wideband omnidirectional antenna supporting all wireless services in the frequency bands 698-960 / 1710-2700 / 3400-4000MHz
- ➔ Typically used in indoor distribution of 2G / 3G / 4G / 5G wireless services in all standardized frequency bands
- ➔ PIM optimized antenna design (150dBc @2x20W)
- ➔ Aesthetical visual appearance, compact and light weight
- ➔ Low loss pigtail with 4.3-10 female connector
- ➔ Ideal for 4G LTE multi-band MIMO applications

### Technical Features

#### GENERAL SPECIFICATIONS

Product Type		Omnidirectional Antenna
Techn. Application		Indoor

#### MECHANICAL SPECIFICATIONS

Number of Input Ports		2
Connectors		4.3-10 female
Connector Cable	mm (in)	0.5 (1.1) (0.5 (1.1))
Height (Less Connectors)	mm (in)	40 (1.57)
Diameter (Less Connectors)	mm (in)	218 (8.58)
Weight	kg (lb)	0.5 (1.1)

#### ELECTRICAL SPECIFICATIONS

Frequenz	MHz	698-960	1710-2700	3400-4000
Gain, typ.	dBi	3.5	4.5	5.0
VSWR		2.0	2.0	2.0
Beamwidth, Vertical, typ.	°	90	45	35
Impedance	Ω	50.0		
Polarization		Linear x2		
Intermodulation (IM3)		-150 dBc		
Total Input Power max.	W	50.0		

#### MATERIAL

Radome Material		ABS
Radome Color		White (RAL 9003)

#### TEMPERATURE SPECIFICATIONS


Operation Temperature	°C (°F)	-40 to 55 (-40 to 131 )
-----------------------	---------	-------------------------

#### TESTING AND ENVIRONMENTAL

Environmental Class		Indoor
---------------------	--	--------



Indoor Omnidirectional MIMO Antenna 698-4000 MHz

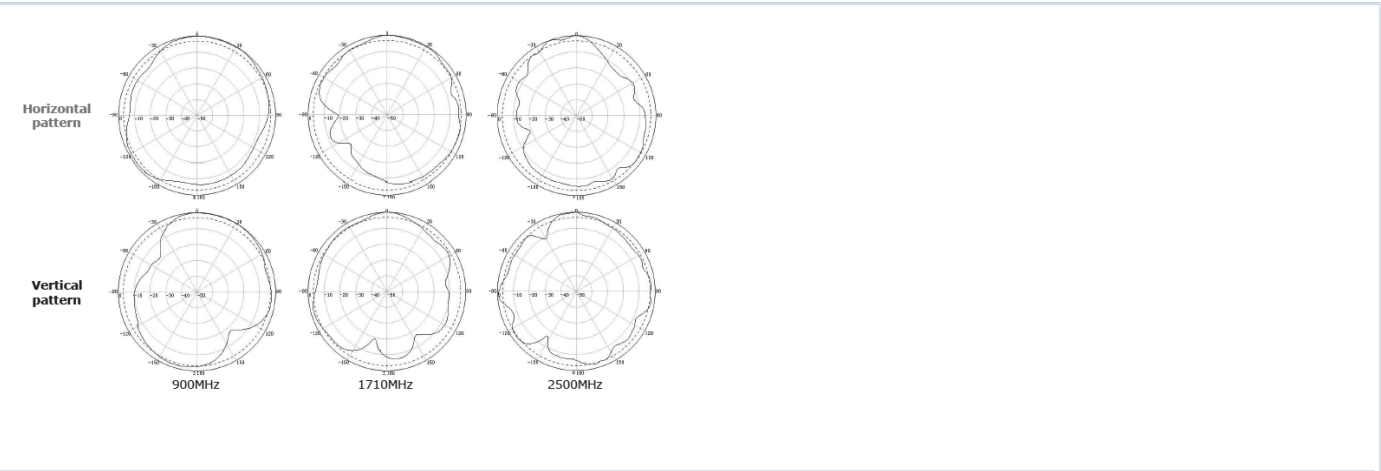

External Document Links	Notes
	Ceiling mounting via hole (standard) Typical isolation between polarizations: >17dB (698-960MHz), >20dB (1710-2700MHz, 3400-4000MHz)

External Link Reference