

End-Fed $\frac{1}{2} \lambda$ Dipole Antenna with Universal FME-Connection System for Portable Equipment in the 1800 M

DESCRIPTION

- Flexible antenna made of steel wire covered with black silicone tubing.
- End-fed $\frac{1}{2} \lambda$ whip – groundplane independent.
- High gain and efficient decoupling from the portable equipment due to half-wave design.
- 5 dB gain compared to a $\frac{1}{4} \lambda$ antenna whip on the same equipment.
- Highest quality materials in a long-lasting and durable design.
- Models available for the DCS-1800/PCN cellular system and for the DECT cordless telephone system.
- Provided with universal FME-connection system for optimum flexibility and easily exchangeable connectors.
- Designed for use with the following of Procom's line of black FME-connectors (to be ordered separately): BFME-BNC, BFME-TNC, BFME-N, BFME-MUHF, BFME-EBNC, BFME-ETNC and BFME-EMUHF.




ORDERING

Type	Product No.	Description	Frequency
FLX 1812/DCS-FME	140000220	DCS-1800/PCN cellular system	1710 - 1880 MHz
FLX 1812/DECT-FME	140000219	DECT cordless telephone	1880 - 1900 MHz

ADDITIONAL DATA


TYPICAL SWR CURVE

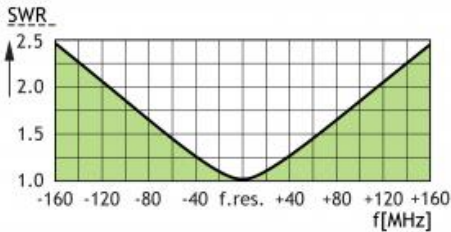

SPECIFICATIONS

Electrical	
Model	FLX 1812/...-FME
Frequency	Center frequency to be stated within 1700-1900 MHz
Antenna Type	End-fed $\frac{1}{2} \lambda$ antenna for portable equipment
Max. Input Power	5 W
Polarisation	Vertical
Impedance	50 Ω
Gain	5 dB (compared to a $\frac{1}{4} \lambda$ portable antenna)
VSWR	< 1.3:1 @ f. res.
Mechanical	
Connection(s)	FME female (Exchangeable BFME-connectors to be ordered separately)
Materials	Silicone tube over flexible steel wire Black-chromed brass
Colour	Black
Height	115 mm / 4.53 in.
Weight	0.025 kg / 0.06 lb

RECOMMENDED BFME-CONNECTORS

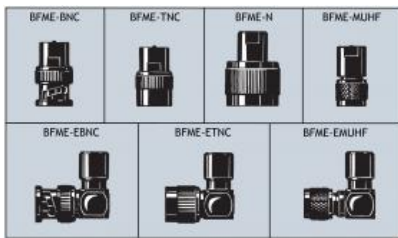

(To be ordered separately)

PLEASE NOTE

The FLX 1812 is also available with SMA male connector, but in this case with fixed, nonexchangeable connector (not FME-connection system). Information on this special version on request.