

## BSF 3604-2B-RM

Band selective, fibre optic, TETRA repeater  
Dual band, 19" rackmount for EMEA & APAC

### Key features

- High power, 36 dBm in each band (with one carrier).
- Two, non-adjacent frequency bands in one 19" rackmount enclosure.
- SC/APC F/O interface.
- Optimized for low noise figure.
- Full monitoring, supervision and alarm handling through SNMP, Webserver or AEM monitoring software via the fibre connection to the associated OMU.
- The unique combination of high output power and highly linear power amplifiers ensures large coverage with uniformly excellent signal quality.
- The BSF 3604 can optionally be upgraded with a second optical transceiver module for redundant fibre applications



The BSF 3604-2B-RM is a fibre optic fed TETRA repeater. This dual band, version processes two different (non-adjacent) bands in one enclosure.


The repeater is part of a system that is fed from a PBE Axell Optical Master Unit (OMU). The maximum optical loss allowed for is 10 dBo between the OMU and the most distant last remote unit that the OMU supports. This offers great flexibility when providing RF coverage in areas where it is not possible to rely on off air transmission.

BSF repeaters can be installed up to 20 km from the base station site, offering great flexibility when providing RF coverage in areas where off air reception is not a preferable or possible solution. The remote BSF repeaters demodulate the optical signal to RF and feed it to a Distributed Antenna System (DAS) or Leaky Feeder array to distribute the RF signal throughout the area to be covered.

The fibre optic system is easily remotely monitored and controlled by PBE Axell's effective supervision tool, Active Element Manager (AEM).

### Automatic optical gain setting

The system gain is adjusted for optical loss in the fibre by measuring the level of a pilot carrier sent from the OMU. The level of the received pilot carrier is continuously monitored.

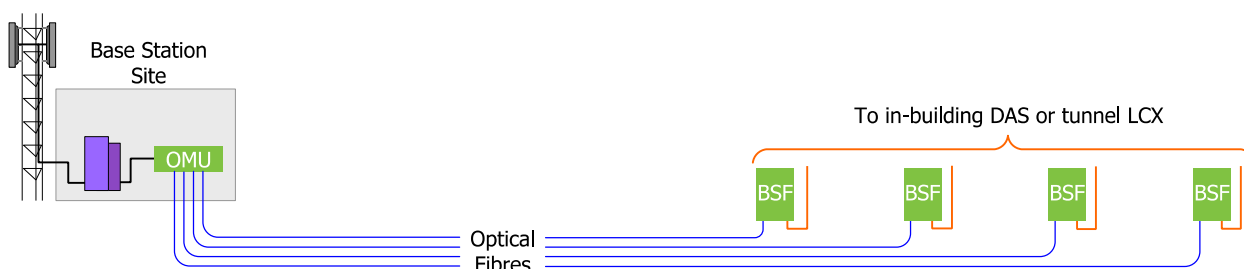

## Technical specification

RF Specification				
General frequency ranges available (others upon request up to 520 MHz, bands must be non-adjacent)		Downlink	Uplink	Bandwidth
		390 MHz to 395 MHz	380 MHz to 385 MHz	5 MHz
		395 MHz to 400 MHz	385 MHz to 390 MHz	5 MHz
		420 MHz to 425 MHz	410 MHz to 415 MHz	5 MHz
		425 MHz to 430 MHz	415 MHz to 420 MHz	5 MHz
		460 MHz to 465 MHz	450 MHz to 455 MHz	5 MHz
		465 MHz to 470 MHz	455 MHz to 460 MHz	5 MHz
		390 MHz to 397 MHz	380 MHz to 387 MHz	7 MHz
		423 MHz to 430 MHz	413 MHz to 420 MHz	7 MHz
390 MHz to 396.5 MHz		380 MHz to 386.5 MHz	6.5 MHz	
Number of frequency bands		2		
Duplex distance (in one band)		10 MHz (others upon request)		
Impedance		50 Ω		
Downlink output power/carrier per band	1 carrier:	+36 dBm		
	2 carriers:	+33 dBm		
	3-4 carriers:	+30 dBm		
	8 carriers:	+27 dBm		
IP3		> +68 dBm		
Noise figure (UL)		<6 dB, 5 dB typical at maximum gain		
Group delay		2 μs max		
Fibre optic loss compensation		Implemented		
Spurious emissions from RF port		< -36 dBm		
Intermodulation products		< -60 dBc or < -36 dBm		
Optical module electrical specification				
Maximum optical output power		+3 dBm ±2 dB		
Maximum optical input power		+2 dBm		
Power Requirements				
Voltage		120 V ac 60Hz or 230 V ac 50Hz or -48 V dc		
Power Consumption		<180 W, typical		
External connection				
Local Maintenance Terminal		RS232		
RF Port		Qty. 1, N type, female		
Optical Ports		Qty. 1, SC/APC, female		
Modem antenna connector( if fitted)		N- Type female		
Remote connection		Via OMU or (optional) GSM, GSM-R PSTN modem or Ethernet		
Mechanical and Environmental specification				
Dimensions		8U high, 482 mm wide by 450 mm deep		
Weight		≈ 30 kg		
Cooling		Convection		
Mounting		19" rackmount		
Operating Temperature		-25 °C to 55 °C		
Storage		-30 °C to 70 °C		
Humidity		0 to 95% RHNC		
Compliance				
Complies with RED:	Safety	EN 62368-1, EN 50385		
	EMC	EN 301 489-1, EN 301 489-5		
	Radio	EN 302 561		