



CELLFLEX® Factory-Fit Jumper Assembly, 1/2" Superflexible Foam, Flame Retardant, N Male / N Male, 1.0 m

Radio Frequency Systems' CELLFLEX® Factory-Fit Jumpers feature specially designed connectors which are soldered-on in a strictly controlled industrial process to ensure industry leading performance for today's high-performance wireless systems. The connector design and manufacturing process has been optimized to produce premium VSWR and IM levels. Injection molded boots provide reliable and repeatable additional sealing level and strain relief.



Picture shows 7M7FS12F-0100FFP for illustration purpose

FEATURES / BENEFITS

- ➔ **Stable premium VSWR, outstanding and consistent intermodulation performance**
Improved network performance, reduces the number of dropped calls and avoids revenue loss
- ➔ **Waterproof to IP 68**
No downtime risk, secures revenue.
- ➔ **Jumper label is serialized**
Ensure traceability.
- ➔ **Compliant to RoHS (EU) and CRoHS (China)**
Usable on a global basis.

Technical Features

STRUCTURE

Cable Type		1/2" Superflexible Foam
Jumper Type		Factory-Fit (Premium)
Connector A		N Male
Center Contact Connector A		Brass, Silver plated
Outer Contact Connector A		Brass, Trimetal plated
Coupling Nut Connector A		Hexagon nut, Nickel plated
Connector B		N Male
Center Contact Connector B		Brass, Silver plated
Outer Contact Connector B		Brass, Trimetal plated
Coupling Nut Connector B		Hexagon nut, Nickel plated
Dielectric		PTFE
Gasket		Silicone rubber
Jacket		JFN: halogen free, non corrosive, flame retardant, low smoke, polyolefin

MECHANICAL SPECIFICATIONS

Length	m (ft)	1 (3.3)
Minimum Bend Radius	mm (in)	32 (1.25)

TESTING AND ENVIRONMENTAL

Sealing class		IP68
---------------	--	------

ELECTRICAL SPECIFICATIONS


Intermodulation	dBc	≤ -159 (typical)
VSWR, Return Loss	VSWR (dB)	≤ 1.052 (32) @ 10 - 1000 MHz ≤ 1.065 (30) @ 1000 - 1700 MHz ≤ 1.065 (30) @ 1700 - 2200 MHz ≤ 1.083 (28) @ 2200 - 2700 MHz ≤ 1.106 (26) @ 2700 - 3800 MHz

TEMPERATURE SPECIFICATIONS

Installation Temperature	°C (°F)	-25 to 60 (-13 to 140)
Operation Temperature	°C (°F)	-50 to 85 (-58 to 185)
Storage Temperature	°C (°F)	-70 to 85 (-94 to 185)



CELLFLEX® Factory-Fit Jumper Assembly, 1/2" Superflexible Foam, Flame Retardant, N Male / N Male, 1.0 m

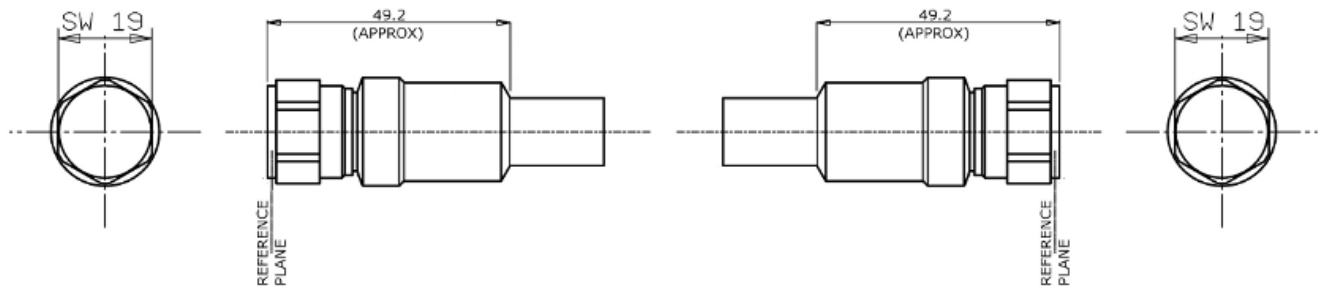

External Document Links

Cable SCF12-50JFN
Handling instruction

Notes