

T-50-UW-43-M

Termination Load, 0–6000 MHz

Product Classification

Product Type Termination load

General Specifications

Device Type Termination Load

Application Indoor/Outdoor

Color Black

Inner Contact Plating Silver

Interface 4.3-10 Male

Outer Contact Plating Trimetal

Dimensions

Height 50 mm | 1.969 in

Width 50 mm | 1.969 in

Length 125 mm | 4.921 in

Electrical Specifications

Average Power, maximum 50 W


Impedance 50 ohm

Operating Frequency Band 0 – 6000 MHz

VSWR 1.2

Derating Curve

T-50-UW-43-M

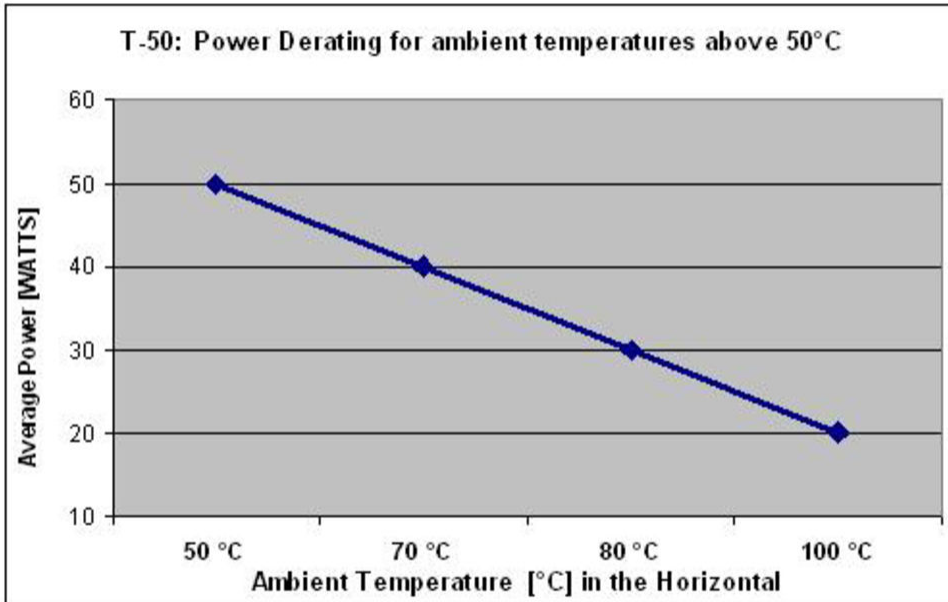

Environmental Specifications

Operating Temperature	-25 °C to +50 °C (-13 °F to +122 °F)
Relative Humidity	Up to 100%
Ingress Protection Test Method	IEC 60529:2001, IP65

Packaging and Weights

Height, packed	58 mm 2.283 in
Width, packed	78 mm 3.071 in
Length, packed	158 mm 6.22 in
Weight, gross	0.42 kg 0.926 lb
Weight, net	0.37 kg 0.816 lb

T-50-UW-43-M

Regulatory Compliance/Certifications

Agency

ISO 9001:2015

**Classification**

Designed, manufactured and/or distributed under this quality management system