

T-2-UW-43-F

Termination Load, 0–6000 MHz



Product Classification

Product Type Termination load

General Specifications

Device Type Termination Load

Application Indoor/Outdoor

Color Black

Inner Contact Plating Silver

Interface 4.3-10 Female

Outer Contact Plating Trimetal

Dimensions

Length 42 mm | 1.654 in

Diameter, maximum 20 mm | 0.787 in

Electrical Specifications

Average Power at Temperature 1.7 W @ 60 °C

Average Power, maximum 2 W


Impedance 50 ohm

Operating Frequency Band 0 – 6000 MHz

VSWR 1.15

Derating Curve

T-2-UW-43-F

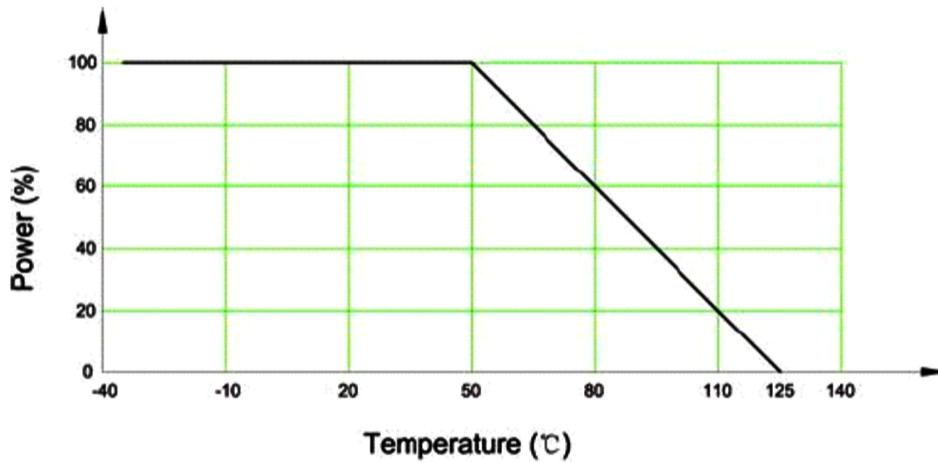

Environmental Specifications

Operating Temperature	-35 °C to +50 °C (-31 °F to +122 °F)
Relative Humidity	Up to 100%
Ingress Protection Test Method	IEC 60529:2001, IP65

Packaging and Weights

Height, packed	68 mm 2.677 in
Width, packed	53 mm 2.087 in
Length, packed	580 mm 22.835 in
Weight, gross	0.07 kg 0.154 lb
Weight, net	0.05 kg 0.11 lb

T-2-UW-43-F

Regulatory Compliance/Certifications

Agency

ISO 9001:2015

**Classification**

Designed, manufactured and/or distributed under this quality management system