




## RSB clip for 1 5/8" RLF, RLK, RLV, RAY

In the impact of a fire in a tunnel the cable should remain functional as long as possible. Special fire resistant clamp type has been developed for keeping the RADIAFLEX® cable attached as long as possible onto the wall. It also prevents the cable from detaching from the wall that might block any escape route. Fire resistant clips (RSB clips) are made of metal and fixed with screws to the wall using metal plugs. In case of fire the round base will melt. But the fixation will hold the cable in position and enables the cable to keep in operation as long as the cable itself allows. The recommended spacing is 8 to 10 m (26 to 33 ft) for both kinds of installation.

RSB-158-001



**FEATURES / BENEFITS**

- ➔ Fire protection installation
- ➔ Keeps the RADIAFLEX® cable in position during fire impact
- ➔ Stainless steel
- ➔ Tool-2 for installation, should be used with metal plug and round base, for RCF 158-50

**Technical Features**

**GENERAL SPECIFICATIONS**



Product Line		Radiating Cable Accessories
Product Type		Hanger
Hanger Type		RSB clip for 1 5/8" RLF, RLK, RLV, RAY
Transmission Line Type		RLF*158 RLK*158 RAY*158 RLV*158
Cable Type		Radiating Cable

**MECHANICAL SPECIFICATIONS**

Cable Size		1-5/8"
Number of Cable / Waveguide Runs		1
Material		Stainless Steel
Drill Hole Size	mm (in)	8 (0.315)

**PACKAGING INFORMATION**

Package Quantity		10
------------------	--	----

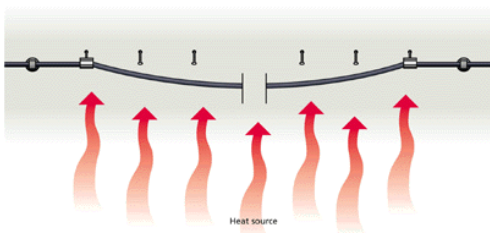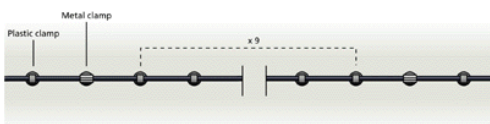

**External Document Links**

**Notes**