

Rubber Antenna with Universal FME-Connection System
for Portable Equipment in the 4 m Band

DESCRIPTION

- Sturdy, conical, flexible rubber antenna.
- Shortened ¼ λ whip yields an acceptable mechanical length.
- Highest quality materials – designed for “wear and tear”.
- Delivered factory tuned and tested to ensure minimum SWR and optimum performance.
- Provided with universal FME-connection system for optimum flexibility and easily exchangeable connectors.
- Designed for use with the following of Procoms line of black FME-connectors (to be ordered separately): BFME-UHF, BFME-BNC, BFME-TNC, and BFME-N.




ORDERING

Type	Product No.	Frequency
GA 4/l-FME	140000062	66 - 76 MHz
GA 4/m-FME	140000063	72 - 82 MHz
GA 4/h-FME	140000060	78 - 88 MHz

ADDITIONAL DATA

RECOMMENDED BFME-CONNECTORS

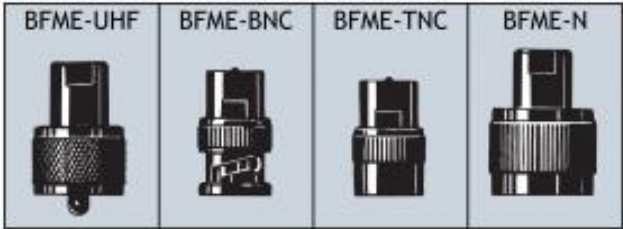

(To be ordered separately)

PLEASE NOTE

THE GA 4 IS ALSO AVAILABLE WITH DIFFERENT THREAD STUDS, BUT IN THIS

CASE WITH FIXED, NON-EXCHANGEABLE CONNECTOR (NOT FME-CONNECTION

system). Information on these special versions on request.

SPECIFICATIONS

Electrical	
Model	GA 4/...-FME
Frequency	4 m band covered by three models
Antenna Type	Shortened ¼λ antenna for portable equipment
Max. Input Power	25 W
Polarisation	Vertical
Impedance	50 Ω
VSWR	< 2.0:1 when mounted directly on portable equipment
Mechanical	
Connection(s)	FME female (Exchangeable BFME-connectors to be ordered separately)
Materials	Steelwire moulded in thermoplastic rubber Black-chromed brass
Colour	Black
Height	500 mm / 19.69 in.
Weight	0.085 kg / 0.19 lb

