

Goose neck hands-Free Microphone

DESCRIPTION

- Goose neck microphone for hands-free operation in vehicles.
- Available with 300 mm or 500 mm goose neck.
- Mounting on steering column, dash board, window frame etc.
- Attractive design.
- Uni-directional pattern.
- High-sensitivity electret cartridge.
- Voltage supply 9–15 VDC when connected as shown in the diagram below.
- Supplied with 4 m cable (incl. Goose neck) terminated with a 3.5 mm plug.
- Wind cap.

SPECIFICATIONS

Electrical	
Model	DM 6600 F-...
Type	Goose neck microphone
Pattern Type	Uni-directional
Impedance	1 kΩ
Frequency Response	Shown in diagram below
Power Supply	Biased from 9-15 VDC power supply via bias resistor. See diagram
Current Consumption	Approx. 0.5 mA
Sensitivity	-44 dB ±3 dB at 1 kHz rel. 1 V/Pa

Mechanical	
Cartridge Type	Electret
Materials	Brass, epoxy laquered. Impact-proof ABS
Cable	4 m (incl. Goose neck) 1 wire with shield with 3.5 mm plug
Colour	Black
Dimensions	DM 6600 F: 350 (L) x 14 (D) mm / 13.7 (L) x 0.5 (D) in. DM 6600 F-500: 560 (L) x 14 (D) mm / 22.0 (L) x 0.5 (D) in.
Weight	DM 6600 F: Approx. 100 g / 0.22 lb. DM 6600 F-500: Approx. 125 g / 0.27 lb.


Environmental	
Operating Temperature Range	Operating : -25° C to +55° C Storage : -40° C to +55° C

ORDERING

Type	Product No.	Description
DM 6600 F	270000038	NECK LENGTH: 300 mm
DM 6600 F-500	270000113 (MOQ: 500 pcs.)	NECK LENGTH: 500 mm



TYPICAL FREQUENCY RESPONSE

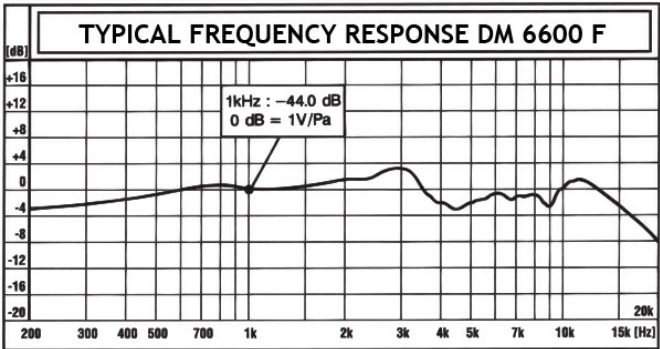

ELECTRICAL DIAGRAM

