

Radiating Cable Connector 11_N_78

Description

N male connector for 7/8" radiating cable

Technical Data

Construction

	Material	Detail	Plating
Body	Brass		SUCOPLATE or similar
Insulator	PTFE		-
Centre conductor	Beryllium bronze, phosphor bronze		Ag

Electrical Data

Interface	According to IEC 61169-16		
Impedance	50	Ω	
Frequency range	3.7	GHz	
VSWR	≤ 1.15	DC to 2.7GHz	
	≤ 1.20	2.7 to 3.7GHz	
Insertion loss	≤ 0.15	dB	
	≤ -150	dBc	
3rd order Intermodulation @2x20W	≥ 2500	Vrms, 50Hz at sea level	
Dielectric withstanding voltage	≥ 5	GΩ	
Insulation resistance			
Contact resistance			
Centre contact	≤ 1.0	mΩ	
Outer contact	≤ 0.25	mΩ	


Mechanical Data

Durability	≥ 500	mating cycles	
------------	-------	---------------	--

Environmental Data

Temperature range	- 40 °C ... + 85 °C
Water proof	IP67
2011/65/EU (RoHS – including 2015/863 and 2017/2102)	Compliant
1907/2006/EC (REACH)	Compliant

Outline dimension (mm)

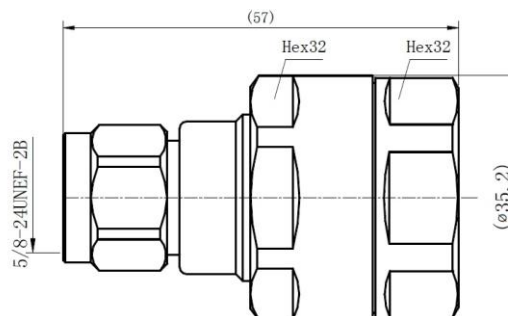

Waiver

It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.

Radiating Cable Connector 11_N_78

Additional Information

Ordering Information

Order as

Item no.	HUBER+SUHNER Type no.	Description
85152707	11_N_78	N male connector for 7/8" radiating cable

Remarks

(For details refer to the HUBER+SUHNER RF CABLES GENERAL CATALOGUE or contact your nearest HUBER+SUHNER partner)

Suitable Radiating Cables

Item no.	HUBER+SUHNER Type no.
85150850	SUCORAD_7/8_LM_FR
85150846	SUCORAD_7/8_MH_FR

Waiver

It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.