




Clic Clamp, 1-5/8" RADIAFLEX polyamide black, halogen free

Fire class UL94HB

UL746C rated material suitable for outdoor applications

**FEATURES / BENEFITS**

Safe and efficient installation of RADIAFLEX® cable with clic-clamps. Simple mounting by using wall plugs and screws. Simply push in by hand, clamp will grip and lock by applying slight pressure.

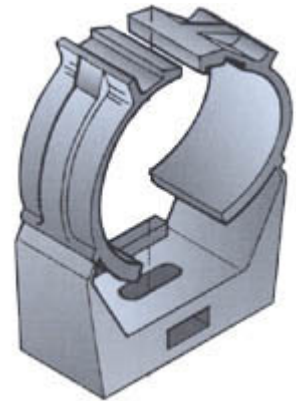

Clic Clamp

**External Document Links**

**Notes**

\* valid for all cable versions

**Technical features**

**GENERAL SPECIFICATIONS**

Product Line		Radiating Cable Accessories
Product Type		Hanger
Hanger Type		Clic clamp
Transmission Line Type		RLF* RLK* RAY*
Cable Type		Radiating Cable
Color		Black

**MECHANICAL SPECIFICATIONS**

Cable Size		1-1/4
Number of Cable / Waveguide Runs		1
Material		Polyamide

**TESTING AND ENVIRONMENTAL**

Fire Class		UL94 HB
------------	--	---------

**TEMPERATURE SPECIFICATIONS**

Installation Temperature	°C (°F)	-20 to 80 (-4 to 176 )
Operation Temperature	°C (°F)	-50 to 85 (-58 to 185 )
Storage Temperature	°C (°F)	-50 to 85 (-58 to 185 )

**PACKAGING INFORMATION**

Package Quantity		100
------------------	--	-----



**CC-114-2**

Clic clamp for RADIAFLEX® 1-1/4"

