



# Metal tie for TAS-120L

In conjunction with the cable tie for messenger wire TAS-120L an additional metal tie can be used as fire protection installation. The recommended installation spacing is 8 - 10 m (26 - 32 ft). Adjustments could be done with tool MK9SST.



**FEATURES / BENEFITS**

Fire protection installation, stainless steel

**Technical Features**

**GENERAL SPECIFICATIONS**


Product Line		Radiating Cable Accessories
Product Type		Hanger
Transmission Line Type		RLV RLF RLK RAY RFC
Cable Type		Radiating Cable

**MECHANICAL SPECIFICATIONS**

Cable Size		1/2" 3/8" 5/8" 7/8" 1-1/4" 1-5/8"
------------	--	-----------------------------------

**PACKAGING INFORMATION**

Package Quantity		100
------------------	--	-----

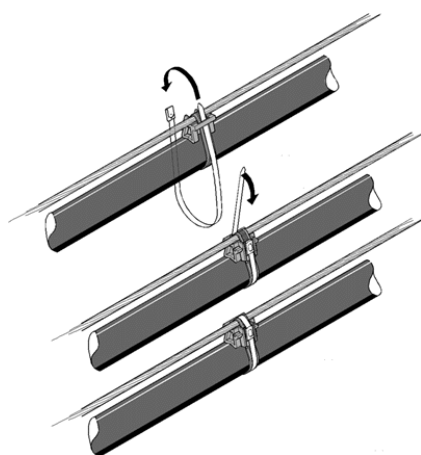

<b>External Document Links</b>	<b>Notes</b>
--------------------------------	--------------