

# RVV-65D-R3VB



6-port sector antenna, 2x 694–960 and 4x 1695–2690 MHz, 65° HPBW, 3x RET

- All Internal RET actuators are connected in “Cascaded SRET” configuration
- Uses the 4.3-10 connector which is 40 percent smaller than the 7-16 DIN connector

## General Specifications

<b>Antenna Type</b>	Sector
<b>Band</b>	Multiband
<b>Color</b>	Light Gray (RAL 7035)
<b>Grounding Type</b>	RF connector inner conductor and body grounded to reflector and mounting bracket
<b>Performance Note</b>	Outdoor usage
<b>Radome Material</b>	Fiberglass, UV resistant
<b>Radiator Material</b>	Aluminum
<b>Reflector Material</b>	Aluminum
<b>RF Connector Interface</b>	4.3-10 Female
<b>RF Connector Location</b>	Bottom
<b>RF Connector Quantity, high band</b>	0
<b>RF Connector Quantity, mid band</b>	4
<b>RF Connector Quantity, low band</b>	2
<b>RF Connector Quantity, total</b>	6

## Remote Electrical Tilt (RET) Information


<b>RET Hardware</b>	CommRET v2
<b>RET Interface</b>	8-pin DIN Female   8-pin DIN Male
<b>RET Interface, quantity</b>	1 female   1 male
<b>Input Voltage</b>	10–30 Vdc
<b>Internal RET</b>	Low band (1)   Mid band (2)
<b>Power Consumption, active state, maximum</b>	10 W
<b>Power Consumption, idle state, maximum</b>	2 W
<b>Protocol</b>	3GPP/AISG 2.0 (Single RET)

# RVV-65D-R3VB

## Dimensions

<b>Width</b>	397 mm   15.63 in
<b>Depth</b>	157 mm   6.181 in
<b>Length</b>	2547 mm   100.276 in
<b>Net Weight, antenna only</b>	28.5 kg   62.832 lb

## Array Layout

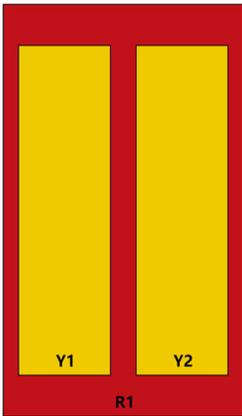

Array ID	Frequency (MHz)	RF Connector	RET (SRET)	AISG No.	AISG RET UID
R1	694-960	1 - 2	1	AISG1	CPXXXXXXXXXXXXR1
Y1	1695-2690	3 - 4	2	AISG1	CPXXXXXXXXXXXXY1
Y2	1695-2690	5 - 6	3	AISG1	CPXXXXXXXXXXXXY2

(Sizes of colored boxes are not true depictions of array sizes)

## Port Configuration



## Electrical Specifications

<b>Impedance</b>	50 ohm
<b>Operating Frequency Band</b>	1695 – 2690 MHz   694 – 960 MHz
<b>Polarization</b>	±45°

# RVV-65D-R3VB

**Total Input Power, maximum** 900 W

## Electrical Specifications

<b>Frequency Band, MHz</b>	<b>694–790</b>	<b>790–890</b>	<b>890–960</b>	<b>1695–1920</b>	<b>1920–2200</b>	<b>2300–2500</b>	<b>2500–2690</b>
<b>Gain, dBi</b>	16.7	17.3	17.7	17.5	18.4	18.9	19.2
<b>Beamwidth, Horizontal, degrees</b>	66	62	59	67	64	64	63
<b>Beamwidth, Vertical, degrees</b>	8.6	7.7	7	5.7	5	4.3	4
<b>Beam Tilt, degrees</b>	2–12	2–12	2–12	2–12	2–12	2–12	2–12
<b>USLS (First Lobe), dB</b>	17	18	17	18	20	19	18
<b>Front-to-Back Ratio, Copolarization 180° ± 30°, dB</b>	28	31	31	27	31	31	28
<b>Isolation, Cross Polarization, dB</b>	28	28	28	28	28	28	28
<b>Isolation, Inter-band, dB</b>	28	28	28	28	28	28	28
<b>VSWR   Return loss, dB</b>	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
<b>PIM, 3rd Order, 2 x 20 W, dBc</b>	-153	-153	-153	-153	-153	-153	-153
<b>Input Power per Port, maximum, watts</b>	250	250	250	200	200	200	200

## Mechanical Specifications

<b>Wind Loading @ Velocity, frontal</b>	669.0 N @ 150 km/h (150.4 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, lateral</b>	366.0 N @ 150 km/h (82.3 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, rear</b>	1,080.0 N @ 150 km/h (242.8 lbf @ 150 km/h)
<b>Wind Speed, maximum</b>	200 km/h (124 mph)

## Packaging and Weights

<b>Width, packed</b>	492 mm   19.37 in
<b>Depth, packed</b>	277 mm   10.906 in
<b>Length, packed</b>	2747 mm   108.15 in
<b>Weight, gross</b>	41.5 kg   91.492 lb

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

# RVV-65D-R3VB

---

REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.andrew.com/ProductCompliance">www.andrew.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



## Included Products

BSAMNT-B95-03	–	Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
---------------	---	--

## \* Footnotes

<b>Performance Note</b>	Severe environmental conditions may degrade optimum performance
-------------------------	---