

## Monoblock Radiating Cable Clamps for Ladders



### MATERIAL

<b>Body</b>	PA6V0 Self Extinguishing Halogen Free UL94 - V0
<b>Operating Temperature</b>	- 40°C + 125°C
<b>Colour</b>	Black

### RAW – APP

#### Monoblock Radiating Cable Clamps for Ladders

The RAW – APP cable clamps have been especially designed for quick installation of radiating cables on ladders, provided with rectangular slots 9x35 mm and 11x35 mm.

The RAW – APP cable clamps can be safely installed on metal ladders with thickness 1.25 – 1.5 mm, and include integrated spacer (80 mm).

The RAW – APP cable clamps are designed to allow fast installation of radiating cables on ladders without need of tools. For installation insert the cable clamp in the rectangular slot on ladder and rotate till lock position.

To prevent cable lines from falling down, in case of fire, a RAW + RSD cable clamp can be installed among RAW – APP cable clamps, using metal screws and nuts, at a suitable distance of 5 – 10 m.

### RAW – APP



#### Fissacavi Monoblocco per Cavi Radianti su Scalette

*I fissacavi RAW – APP sono progettati per una rapida installazione di cavi radianti su scalette dotate di finestre rettangolari 9x35 mm e 11x35 mm.*


*I fissacavi RAW – APP possono essere installati su scalette metalliche di spessore 1.25 – 1.5 mm e hanno integrato il distanziatore da 80 mm.*

*I fissacavi RAW – APP sono progettati per un veloce aggancio di cavi radianti su scalette, senza l'utilizzo di utensili. Per l'installazione inserire il fissacavo nella finestra rettangolare sulla scaletta e ruotare fino alla posizione di bloccaggio.*


*Per conferire all'impianto protezione anticaduta in caso di incendio, è possibile installare un RAW + RSD intercalato ai fissacavi RAW – APP, utilizzando viteria metallica, ad opportuna distanza (5 – 10 m).*

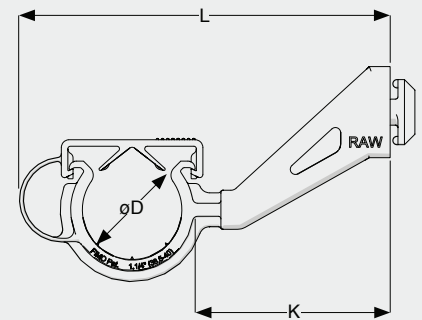


Rotate RAW horizontally clockwise.

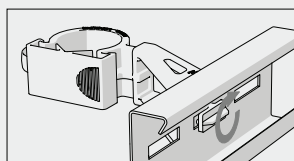

Insert TAB on back of RAW into slot.

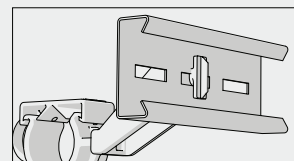

Rotate RAW anticlockwise to vertical position

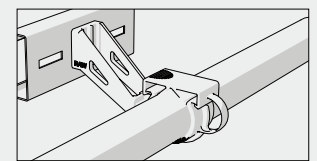

Insert cable and close bracket. Installed in few seconds!

CODE*	ARTICLE	CABLES	FOR CABLES ØD	K	L	BAG	WEIGHT
61 5041 0012	RAW 1/2"- 80 APP11 x 1.25	1/2"	15.5 - 17	80	117	50	40
61 5041 0078	RAW 7/8"- 80 APP11 x 1.25	7/8"	26.5 - 28	80	132	50	47
61 5041 0079	RAW 7/8" M- 80 APP11 x 1.25	7/8"	28.5 - 29.5	80	132	50	47
61 5041 0114	RAW 1.1/4"- 80 APP11 x 1.25	1.1/4"	38.5 - 40	80	143	50	54
61 5041 0115	RAW 1.1/4" M- 80 APP11 x 1.25	1.1/4"	40.5 - 42	80	143	50	54
61 5041 0158	RAW 1.5/8"- 80 APP11 x 1.25	1.5/8"	48.5 - 50.5	80	152	50	59
61 5042 0012	RAW 1/2"- 80 APP9 x 1.25	1/2"	15.5 - 17	80	117	50	40
61 5042 0078	RAW 7/8"- 80 APP9 x 1.25	7/8"	26.5 - 28	80	132	50	47
61 5042 0079	RAW 7/8" M- 80 APP9 x 1.25	7/8"	28.5 - 29.5	80	132	50	47
61 5042 0114	RAW 1.1/4"- 80 APP9 x 1.25	1.1/4"	38.5 - 40	80	143	50	54
61 5042 0115	RAW 1.1/4" M- 80 APP9 x 1.25	1.1/4"	40.5 - 42	80	143	50	54
61 5042 0158	RAW 1.5/8"- 80 APP9 x 1.25	1.5/8"	48.5 - 50.5	80	152	50	59