



**NMR-LCF14-E01**

N Male Right Angle Connector for 1/4" Coaxial Cable, OMNI FIT™ Premium, Straight, O-Ring and compression sealing


Radio Frequency Systems line of high performance coaxial cable connectors are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up the attachment of connectors to CELLFLEX® coaxial cables.

All RFS connectors are fully tested for mechanical and electrical compliance to industry specifications.

The N connector meets all technical requirements and covers high frequencies as well as legacy applications. Sealing against outer conductor and jacket by means of O-Ring and 360° compression fit. Multifunctional, self-lubricating HighTech polymer assembly locks on cable corrugation, avoids electrochemical potential differences and compression-fits to the jacket.;

**FEATURES / BENEFITS**

- Ultra high PIM performance i.e. reduced interference leading to high customer satisfaction
- Two-piece design i.e. visual inspection of interlocking leads to improved installation security
- OMNI FIT™ concept i.e. streamlined order management and reduced stock level
- Watertight sealing in mated and unmated condition, i.e. reduced efforts during installation and improved security during operation
- Unique NiTin plating i.e. extreme resistance against corrosion even under hardest climatic and environmental circumstances
- Multi-thread (Tristart) design i.e. simplified and accelerated tightening process
- RoHS (EU) and CRoHS (China) compliant i.e. can be used on a global basis



OMNI FIT™ Premium Connectors

**Technical features**

**GENERAL SPECIFICATIONS**

Transmission Line Type		Coaxial Cable
Cable Size		1/4
Cable Type		Foam Dielectric
Model Series		LCF14-50 Series
Connector Interface		N
Connector Type		OMNI FIT™ PREMIUM Right Angle
Sealing Method		O-Ring
Gender		Male

**ELECTRICAL SPECIFICATIONS**

Nominal Impedance, ohms	Ohm	50
3rd Order IM Product @ 2x20 Watts	dBc	-156 ; typical -162
Maximum Frequency	GHz	6
VSWR, Return Loss	VSWR (dB)	0 <math>\leq f \leq 1.0 \text{ GHz}</math>: 1.02 (40) 1.0 <math>\leq f \leq 2.2 \text{ GHz}</math>: 1.04 (34) 2.2 <math>\leq f \leq 2.7 \text{ GHz}</math>: 1.04 (34) 2.7 <math>\leq f \leq 3.8 \text{ GHz}</math>: 1.08 (28) 3.8 <math>\leq f \leq 5.0 \text{ GHz}</math>: 1.17 (22) 5.0 <math>\leq f \leq 6.0 \text{ GHz}</math>: 1.22 (20)

**MECHANICAL SPECIFICATIONS**

Plating Outer/Inner		Tri metal alloy/Silver
Length	mm (in)	58.9 (2.319)
Outer Diameter	mm (in)	22 (0.866)
Inner Contact Attachment		Spring Finger
Outer Contact Attachment		360° clamping



**NMR-LCF14-E01**


N Male Right Angle Connector for 1/4" Coaxial Cable, OMNI FIT™ Premium, Straight, O-Ring and compression sealing

**ACCESSORIES**

Wrench size front	mm (in)	22
Wrench size rear	mm (in)	20

**TESTING AND ENVIRONMENTAL**

Waterproof Level		IP68
------------------	--	------

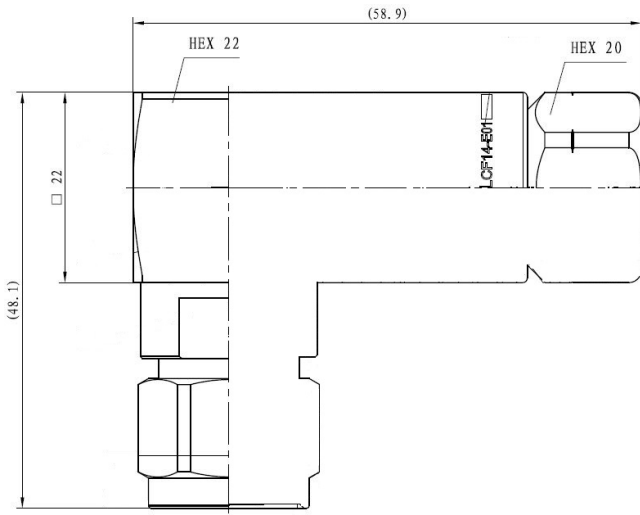

External Document Links  
[Installation Instruction](#)

Notes