


MODEL 69	SPECIFICATIONS (3 - 5.5V)
ANTENNA TYPE	Active mobile GPS antenna for roof, dashboard or in-car window mounting  * UNIVERSAL AND SIMPLE INSTALLATION * SMALL SIZE – LOW PROFILE DESIGN * WATER PROOF IP67 – NON CORROSIVE
FREQUENCY	1575,42 MHz
IMPEDANCE	Nom. 50 $\Omega$
POLARISATION	RHC (Right Hand Circular)
GAIN (LNA) NOISE FIG.	Nom. 26 dB Typ. 1,3 dB
POWER SUPPLY	+ 3,0 – 5,5 VDC (20 mA)
VSWR	< 2.0
DIMENSIONS	Ø 38,5 x 12,5 mm
COLOUR	Black
BUILD-IN DEPTH	N/A
WEIGHT	Approx. 60 g (3 m cable included)
MOUNTING	Preferable on horizontal surfaces (+-15° tilt allowed) In-car window mounting on low-angle screens only !
MATERIAL	ABS, BRASS, PE and PCB
MOUNT TYPE	Self-adhesive (1 pc adhesive tape for roof-mounting + 1 pc for optionally window mounting is supplied)

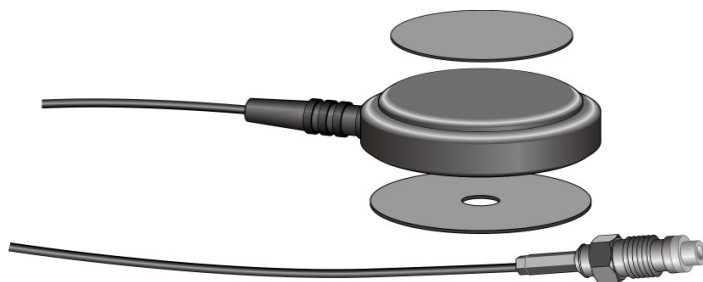

CABLE/CONNECTOR	
69/F-3	3 m RG174C/U fixed cable with FME (f) connector
69/F-3-SMA	3 m RG174C/U fixed cable with SMA (m) connector
69/F-5	5 m RG174C/U fixed cable with FME (f) connector
69/F-5-SMA	5 m RG174C/U fixed cable with SMA (m) connector

SPARE PARTS	RE-INSTALATION KIT	Art. No. K-68/69
	VELCRO KIT	Art. No. KB-68/69